


# T80 FLEX CUTTER SYSTEM

***"Works in relined 3" to 6" pipe!"***

- Navigates through 90 degree bends
- Reinstates in 3" (80mm) to 6" (150mm) pipe
- Indoor/Outdoor, Vertical/Horizontal applications
- Cutting head includes color camera with lens wiper and air blow off for clear vision
- Quick and simple set up
- Water hydraulic cutting head provides 400% more torque than a typical air router
- Access pipe systems via cleanout ports or rooftop vents
- Hydraulically actuated cutting head and clamping mechanism
- Entire unit fits through 24" opening

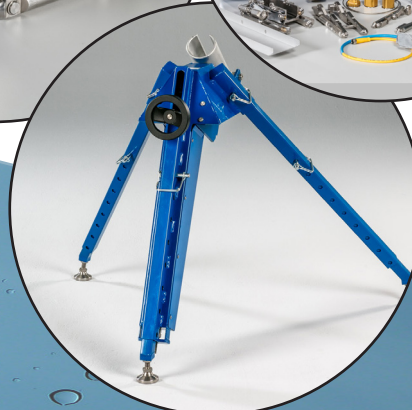

## **TRY TEK Machine Works, Inc.**

250 N. Main St.  
Jacobus, PA 17407

(717) - 428 - 1477

[trytek@trytek.com](mailto:trytek@trytek.com)  
[www.trytek.com](http://www.trytek.com)



*Over 30 Years of Product Excellence!*



## Technical Specifications

Model	T80 Flex Cutter System
Pipe Diameters	3" (80mm) - 6" (150mm)
Dimensions	35" Lg. x 22.5" Wd. x 51" tall (890mm lg. x 572mm wd. x 1295mm tall)
Reach	100 Feet (30M)
Weight	270 lbs. (122 kg)
RPM	7,000
Power	2 hp (1.5kW) water hydraulically driven*
Cutting Bits	3 bit sizes available - ( 13mm, 25mm, 45mm ) Tall
Oil hydraulic system	2,000 PSI (138 bar) operates clamping and tilt
Electrical Requirements	120/220 VAC 50/60Hz 5/2.5 amps
Electric Power Hook-Up	Standard American flat blade 2 pole/3 wire outlet
Following support items supplied by customer	
Water Supply	Standard garden hose faucet (4 gpm)
Power Washer/Jetter	Minimum requirement is 2,000 PSI (138 bar) at 3 GPM (11 lpm) Maximum requirement is 4,000 PSI (276 bar) at 4 GPM (15 lpm)
Air Compressor	90 PSI (7 bar) and 2 CFM (57 l/min)



\* Achieved with 4,000 PSI (276 bar) at 4 GPM (15 lpm) power washer.



**SALES • SERVICE • PARTS**  
(717)-428-1477 • 8AM - 5PM EST

